

SINGLE ACTING- THREADED RAM CYLINDER WITH SAFETY LOCKNUT

CAPACITY	10 to 2000 tons
TYPE	Single-acting, spring-return with mechanical load holding
RAM	Threaded piston rod for versatility
LOCKNUT	Heavy-duty safety locknut for secure mechanical load holding
PRESSURE RATING	Up to 700 bar
BUILD	Rugged alloy steel construction with corrosion-resistant finish

FEATURES:

Spring-assisted retraction

Locknut prevents load drop during extended hold

Ideal for maintenance and construction applications requiring sustained load support


APPLICATIONS:

Jacking,

Lifting, and load holding in civil,

Mining

Heavy industry

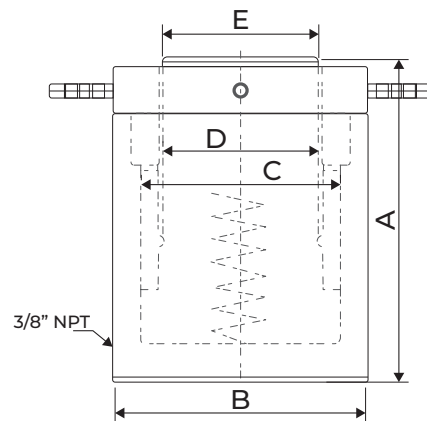

TECHNICAL SPECIFICATIONS

Model	Capacity (ton)	Stroke (mm)	Closed height A (mm)	Cylinder OD B (mm)	Bore dia. C (mm)	Ram dia. D (mm)	Wt. (Approx.) (kg)
OHJS 10-150	10	150	245	60	45	40	4.5
OHJS 15-150	15	150	250	70	55	50	6.5
OHJS 20-150	20	150	260	80	63	55	9
OHJS 25-150	25	150	270	90	70	55	11.3
OHJS 30-150	30	150	275	100	75	60	14.5
OHJS 50-150	50	150	290	130	100	80	26.5
OHJS 75-150	75	150	295	155	120	95	37
OHJS 100-150	100	150	305	180	140	110	56
OHJS 150-150	150	150	325	220	170	140	86
OHJS 200-150	200	150	340	255	200	160	110
OHJS 250-150	250	150	350	280	220	180	134
OHJS 300-150	300	150	370	310	240	200	176
OHJS 400-150	400	150	405	350	270	220	240
OHJS 500-150	500	150	465	400	300	250	363